



**MOD  
COM  
ONE**™

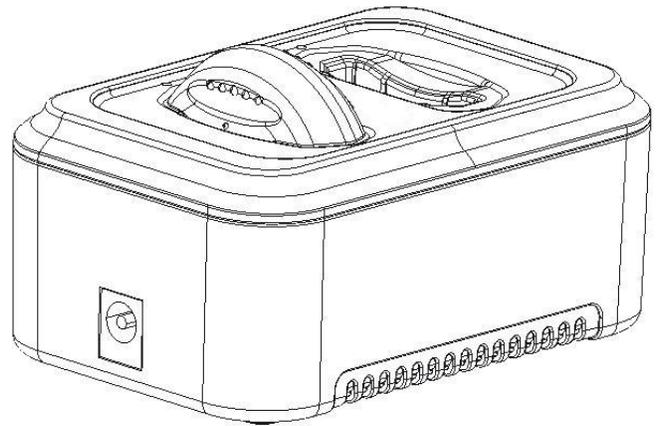

# Battery Charger Quick Start Guide

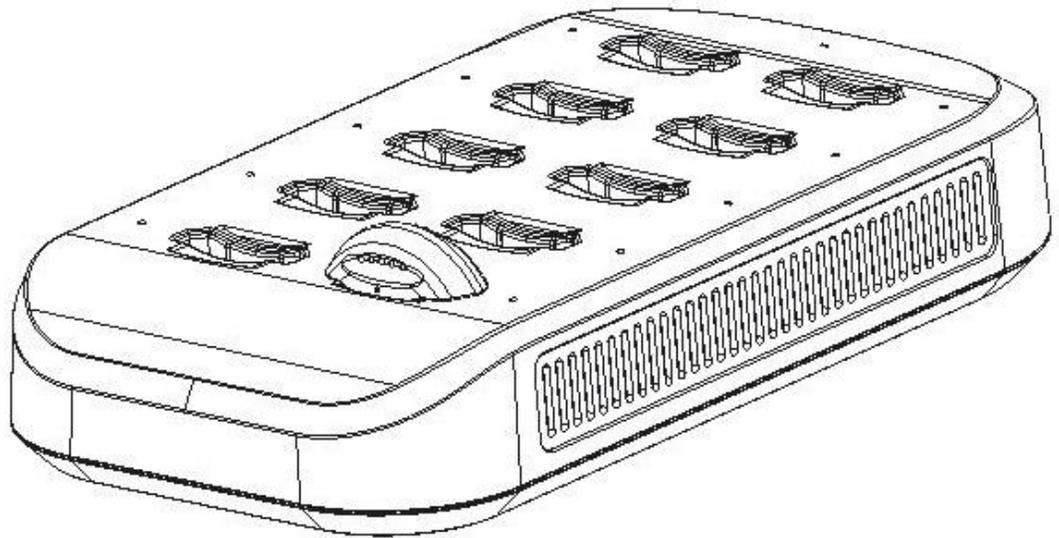

Trident  
Communication  
Technology™

# Contents

<b>Thank You.....</b>	<b>1</b>
<b>Please Read this Owner’s Guide .....</b>	<b>1</b>
<b>Box Content.....</b>	<b>1</b>
<b>ModCom One™ Battery Removal .....</b>	<b>2</b>
<b>ModCom One™ Charger Setup .....</b>	<b>2</b>
<b>ModCom One™ Charger Setup (Cont.) .....</b>	<b>3</b>
<b>Battery Charging .....</b>	<b>4</b>
<b>Operating and Cleaning Maintenance .....</b>	<b>4</b>
<b>Troubleshooting .....</b>	<b>5</b>
<b>Lithium-ion Battery Safety Guidelines.....</b>	<b>5</b>
<b>Safety and Regulatory Information .....</b>	<b>6</b>



# Thank You

We appreciate your choice of the Trident Communication Technology™ ModCom One™ 2-Bay Charger (P/N MC1 CB-2) and/or 10-Bay Charger (P/N MC1 CB-10).

## Please Read this Owner's Guide

Please take the time to follow the instructions in this owner's guide carefully. It will help you set up and operate your system properly and enjoy its advanced features. Please save this guide for future reference.

## Box Content

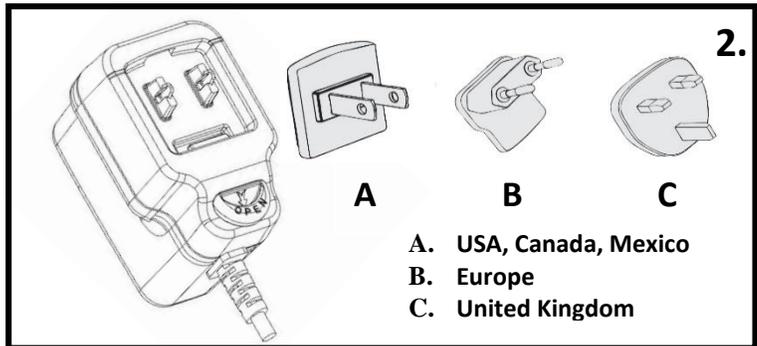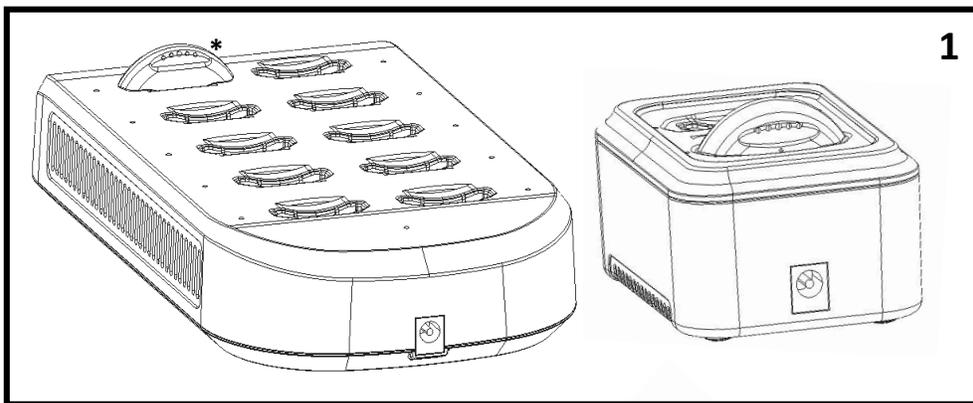


- |                        |                                       |
|------------------------|---------------------------------------|
| 1. ModCom One™ Charger | 2-Bay or 10 Bay Charger               |
| 2. AC Wall Adapter     | Global AC Wall Adapter Configurations |
| Quick Start Guide      | Quick Start Reference Guide           |

\*Battery not included



# ModCom One™ Battery Removal

1. Pivot Bluetooth® Headset Module 45 degrees downward until it stops.
2. Remove Battery from Bluetooth Headset Module.

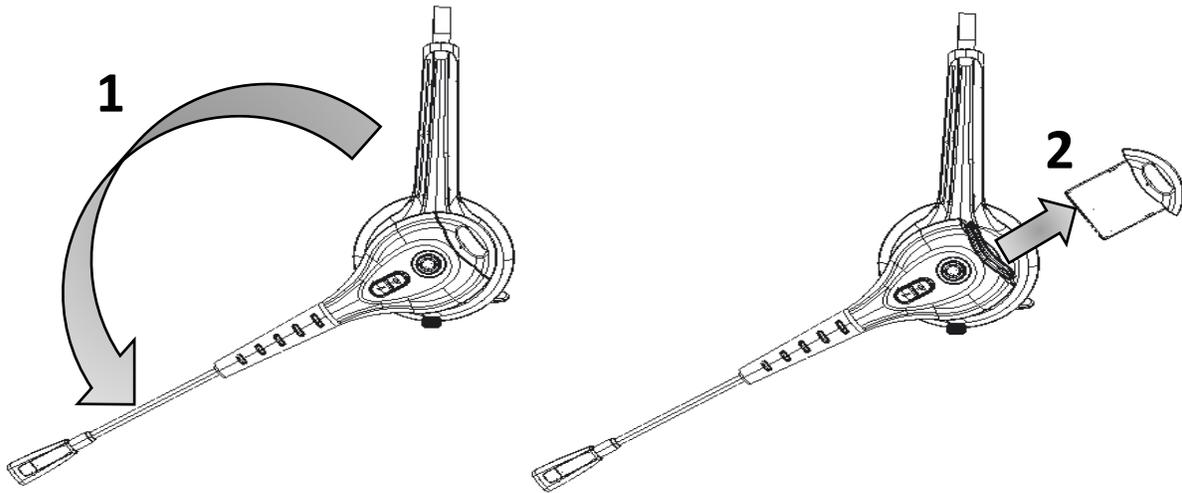


# ModCom One™ Charger Setup

Select the appropriate Global Plug Adapter and insert into AC Adapter.

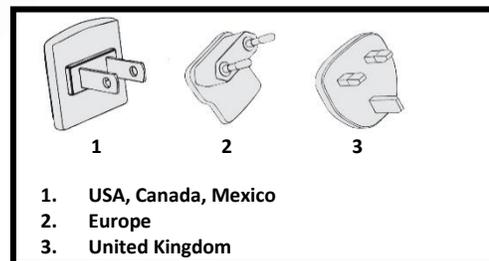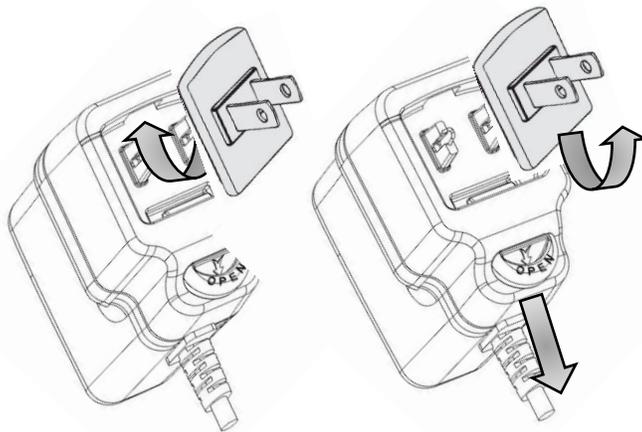

## ModCom One™ Charger Setup (Cont.)

1. Insert charge cable into charger jack.
2. Plug the AC adapter into the appropriate AC wall receptacle.

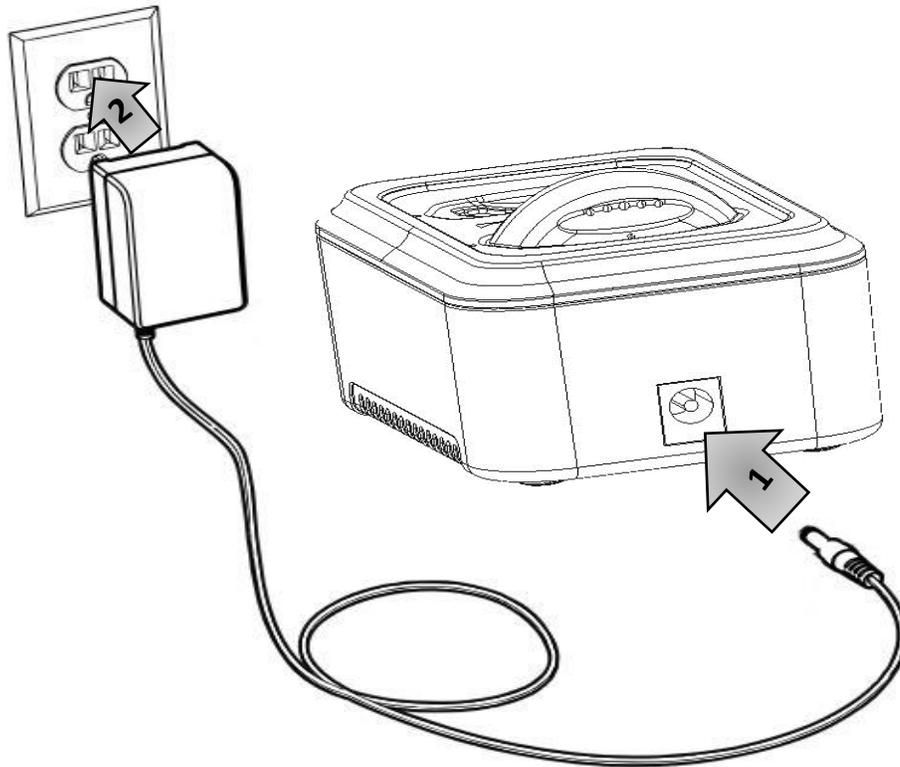

# Battery Charging

Although the Batteries are partially charged at the factory, we recommend you fully charge them before first use. Allow up to 3 hours for a full charge. Carefully insert the Battery into the charging slots\*. The multi-color LED will indicate the status of the charger as per the following table.

LED Status	Battery Charger Status
Red/Green/Off	During power up, indicates charger is operational
Solid Red	Charging
Solid Green	Battery fully charged
Off	No battery in charging slot

\*Ensure that you follow the guidelines for Battery Safety described in Battery Safety Guidelines on page 5.

Charger Specifications	
Charging Time	Approximately 1.5 Hours; Max Time: 3 Hours ± 30 Minutes
Operating Temperature	+32°F – +95°F (+0°C – +35°C)
Storage Temperature	-40°F – +122°F (-40°C – +50°C)
Input Voltage	100-240 VAC 50-60 Hz +/- 3Hz
Maximum Input Power	14.35W
Certification	FCC ID:2AEAB55596, IC:12773A-55596, CE0681Ⓢ, WEEE, UL (AC/DC Adapter only)

 **Bluetooth®** The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Trident Communication Technology™ is under license. Other trademarks and trade names are those of their respective owners.

# Operating and Cleaning Maintenance

To maintain the ModCom One™ Charger we suggest the following guidelines:

- Do not expose the Charger to harsh chemicals or cleaning agents.
- Do not charge the battery in damp or wet locations.
- Do not store the battery or charger in damp or wet locations.
- Do not use charger in the presence of explosive atmospheres (gaseous fumes, dust or flammable materials).
- Charge in a well ventilated area.
- Do not block charger vents.
- Keep vents clear to allow proper ventilation.
- Do not allow smoking or open flames near a charging battery. Vented gases may explode.
- If the Headset becomes dirty, wipe it off with a damp cloth. Do not use soap, cleaning fluids or chemicals.
- Keep dust, dirt and debris out of the Battery Charger Slots.
- When handling the Headset Battery, keep the Battery Contacts free of dirt, grease, oil or other substances that can affect the Battery from making proper contact with the Charger.

# Troubleshooting

Operation	Problem	Possible Solution
Charging Battery	Battery does not seat properly in the Charging Slot	Rotate Battery and re-insert into Charging Slot.
Charging Battery	No LED's Light on Charger when Battery is inserted	Check Power Cable connection to Charger.
Charging Battery	No LED's Light on Charger when Battery is inserted	Battery may be faulty. Replace Battery.

## Lithium-ion Battery Safety Guidelines

- The area in which the Batteries are charged should be clear of debris and combustible materials or chemicals. Improper Battery use may result in a fire, explosion, or other hazard.
- To charge the Headset Battery, the Battery and Charger temperatures must be between 0°C and +50°C (+32°F and +122°F).
- Do not use incompatible Batteries and/or Chargers. Use of an incompatible Battery or Charger may present a risk of fire, explosion, leakage, or other hazard. If you have any questions about the compatibility of a Battery or a Charger, contact your Distributor Customer Support.
- Do not disassemble, open, crush, bend, deform, puncture, or shred.
- Severe impact from dropping any Battery-Operated Device on a hard surface could cause the Battery to overheat.
- Do not short circuit a Battery or allow metallic or conductive objects to contact the Battery terminals.
- Do not modify or remanufacture, attempt to insert foreign objects into the Battery, immerse or expose to water or other liquids, or expose to fire, explosion, or other hazard.
- Do not leave or store the Equipment in or near areas that might get very hot, such as in a parked vehicle, near a radiator or other heat source.
- Do not place Battery in a microwave oven, conventional oven, toaster oven, washer, dryer, dishwasher, or other mechanical devices.
- Battery usage by children should be supervised.
- Please follow local regulations to promptly dispose of used re-chargeable Batteries.
- Do not dispose of Batteries in fire.
- Seek medical advice immediately if a Battery has been swallowed.
- In the event of a Battery leak, do not allow the liquid to come in contact with the skin or eyes. If contact is made, wash the affected area with large amounts of water and seek medical advice.
- If you suspect damage to your equipment or Battery, contact your Distributor Customer Support to arrange for inspection.

# Safety and Regulatory Information



- **Warnings for use of Wireless Devices.** Please observe all warning notices with regard to the usage of wireless devices.



- **Potentially Hazardous Atmospheres – Vehicles Use.** You are reminded of the need to observe restrictions on the use of radio devices in fuel depots, chemical plants etc. and areas where the air contains chemicals or particles (such as grain, dust, or metal powders) and any other area where you would normally be advised to **turn off your vehicle engine.**



- **Potentially Hazardous Atmospheres – Fixed Installations.** You are reminded of the need to observe restrictions on the use of radio devices in fuel depots, chemical plants etc. and areas where the air contains chemicals or particles (such as grain, dust, or metal powders).

- Contains small parts which can be a choking hazard.
- Not suitable for children under age 3.
- This product contains magnets which can be harmful to pacemakers, or similar medical devices.
- To reduce the risk of fire or electrical shock, do not expose the product to rain or moisture.
- As with any electronic products, use care not to spill liquids into any part of the system. Liquids can cause a failure and/or a fire hazard.
- Do not place any naked flame sources, such as lighted candles, on or near the apparatus.
- Use caution when using your headset while operating a vehicle or engaging in any activity that requires your full attention. Check and follow local laws regarding mobile phone and headset use. Some jurisdictions impose specific limitations, such as single earpiece configuration, on the use of such products while driving.
- Sounds that you rely on as reminders or warnings may sound different when using a headset. Be aware of how these sounds may vary in character so you can recognize them as needed.

- Do not leave a battery on prolonged charge when not in use.

## CAUTION:

Do not make modifications to the headset or accessories. Unauthorized alterations may compromise safety, regulatory compliance, and product performance and warranty.



- Long-term exposure to loud music may cause hearing damage. It is best to avoid extreme volume when using a headset, especially for extended periods.
- Use only with the supplied power supply meeting local regulatory requirements (ex. UL, CSA, VDE, CCC).
- Use caution when using a Headset while operating a motor vehicle or anywhere the inability to hear outside sounds may present a danger to you or others.
- The ModCom One™ Headset does not require scheduled cleaning. Should cleaning be necessary, simply wipe the outside surfaces with a soft damp cloth.

## Regulatory Information

All Trident Communication Technology™ devices are designed to be compliant with rules and regulations in the locations they are sold and will be labeled as required. This regulatory information applies to Model number MC1-BT.

## International

This device complies with internationally recognized standards covering human exposure to electromagnetic fields from radio devices.



## Wireless Device Country Approvals

Regulatory markings, subject to certification, are applied to the device signifying the radio (s) is/are approved for use in the following countries: United States, Canada, and Europe.

**Note:** Europe includes Austria, Belgium, Bulgaria, Czech Republic, Cyprus, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Liechtenstein, Lithuania, Luxembourg, Malta,

Netherlands, Norway, Poland, Portugal, Romania, Slovak Republic, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

## CE NOTICE TO USERS

Trident Communication Technology™ hereby declares that this product is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC, 2011/65/EU and all other applicable EU directive requirements.

## FCC NOTICE TO USERS

This device complies with FCC and Industry Canada RF radiation exposure limits set forth for general population. It must not be co-located or be operating in conjunction with any other antenna or transmitter.

### **In the United States:**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, this is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, you are encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the Headset Charger to an outlet on a different circuit than the one to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by Trident Communication Technology™ could void the user's authority to operate this equipment.

### **In USA and Canada:**

This device complies with part 15 of the FCC rules and Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

1. l'appareil ne doit pas produire de brouillage, et
2. l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This class B digital apparatus complies with CAN ICES-3 (B) / NMB-3 (B)



### **Waste Electrical and Electronic Equipment**

This symbol on the product or on its packaging indicates that this product must not be disposed of with your other household waste. Instead, it is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help to conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste equipment for recycling, please contact your local city/town office or the distributor where you purchased your equipment.